


# KAROO BLEND FACE BRICK

3b

Coverage  
**52**  
per m<sup>2</sup>

## RUSTIC



<b>Class</b>	<b>FBA</b>
<b>Average Compressive Strength</b>	<b>50 MPA</b>
<b>Material</b>	<b>Clay, perforated</b>
<b>Average mass</b>	<b>2,6 Kg</b>
<b>Average size</b>	<b>222x106x73mm</b>
<b>Moisture Expansion</b>	<b>Category II</b>
<b>Average Water absorption</b>	<b>6,8%</b>
<b>Efflorescence</b>	<b>Slight</b>

Coverage  
**52**  
per m<sup>2</sup>

## TRAVERTINE



<b>Class</b>	<b>FBA</b>
<b>Average Compressive Strength</b>	<b>50 MPA</b>
<b>Material</b>	<b>Clay, perforated</b>
<b>Average mass</b>	<b>2,6 Kg</b>
<b>Average size</b>	<b>222x106x73mm</b>
<b>Moisture Expansion</b>	<b>Category II</b>
<b>Average Water absorption</b>	<b>6,8%</b>
<b>Efflorescence</b>	<b>Slight</b>



SPECIALS: AVAILABLE BY ARRANGEMENT

Due to the natural qualities of clay, variations in brick colours may occur – use this catalogue as a general guide.

Crammix Pty Ltd., P.O. Box 2, Brackenfell, Western Cape, 7561, Tel: 021 981-2115, Fax: 021 981-4520  
George Depot: Tel: 044 878-0186, Fax: 044 878-0191  
Blouberg Sales Office: Tel: 021 554-0545, Fax: 021 554-0546  
E-mail: [bricks@crammix.co.za](mailto:bricks@crammix.co.za) Web: [www.crammix.co.za](http://www.crammix.co.za)




# SAHARA SAND FACE BRICK

4a

## RUSTIC

Coverage  
52  
per m<sup>2</sup>



Class	FBS
Average Compressive Strength	45 MPA
Material	Clay, perforated
Average mass	2,6 Kg
Average size	222x106x73mm
Moisture Expansion	Category II
Average Water absorption	5,8%
Efflorescence	Slight



## TRAVERTINE

Coverage  
52  
per m<sup>2</sup>



Class	FBS
Average Compressive Strength	45 MPA
Material	Clay, perforated
Average mass	2,6 Kg
Average size	222x106x73mm
Moisture Expansion	Category II
Average Water absorption	7%
Efflorescence	Slight



SPECIALS: AVAILABLE BY ARRANGEMENT

Due to the natural qualities of clay, variations in brick colours may occur – use this catalogue as a general guide.

Crammix Pty Ltd., P.O. Box 2, Brackenfell, Western Cape, 7561, Tel: 021 981-2115, Fax: 021 981-4520  
George Depot: Tel: 044 878-0186, Fax: 044 878-0191  
Blouberg Sales Office: Tel: 021 554-0545, Fax: 021 554-0546  
E-mail: [bricks@crammix.co.za](mailto:bricks@crammix.co.za) Web: [www.crammix.co.za](http://www.crammix.co.za)



# APRICOT BLEND FACE BRICK

4b

## RUSTIC

Coverage  
**52**  
per m<sup>2</sup>



<b>Class</b>	<b>FBS</b>
<b>Average Compressive Strength</b>	<b>60 MPA</b>
<b>Material</b>	<b>Clay, perforated</b>
<b>Average mass</b>	<b>2,6 Kg</b>
<b>Average size</b>	<b>222x106x73mm</b>
<b>Moisture Expansion</b>	<b>Category II</b>
<b>Average Water absorption</b>	<b>5,5%</b>
<b>Efflorescence</b>	<b>Slight</b>

## TRAVERTINE

Coverage  
**52**  
per m<sup>2</sup>



<b>Class</b>	<b>FBS</b>
<b>Average Compressive Strength</b>	<b>56 MPA</b>
<b>Material</b>	<b>Clay, perforated</b>
<b>Average mass</b>	<b>2,6 Kg</b>
<b>Average size</b>	<b>222x106x73mm</b>
<b>Moisture Expansion</b>	<b>Category II</b>
<b>Average Water absorption</b>	<b>5,9%</b>
<b>Efflorescence</b>	<b>Slight</b>



SPECIALS: AVAILABLE BY ARRANGEMENT

Due to the natural qualities of clay, variations in brick colours may occur – use this catalogue as a general guide.

Crammix Pty Ltd., P.O. Box 2, Brackenfell, Western Cape, 7561, Tel: 021 981-2115, Fax: 021 981-4520  
George Depot: Tel: 044 878-0186, Fax: 044 878-0191  
Blouberg Sales Office: Tel: 021 554-0545, Fax: 021 554-0546  
E-mail: [bricks@crammix.co.za](mailto:bricks@crammix.co.za) Web: [www.crammix.co.za](http://www.crammix.co.za)




# FLAME BLUE FACE BRICK

5a

## RUSTIC

Coverage  
52  
per m<sup>2</sup>

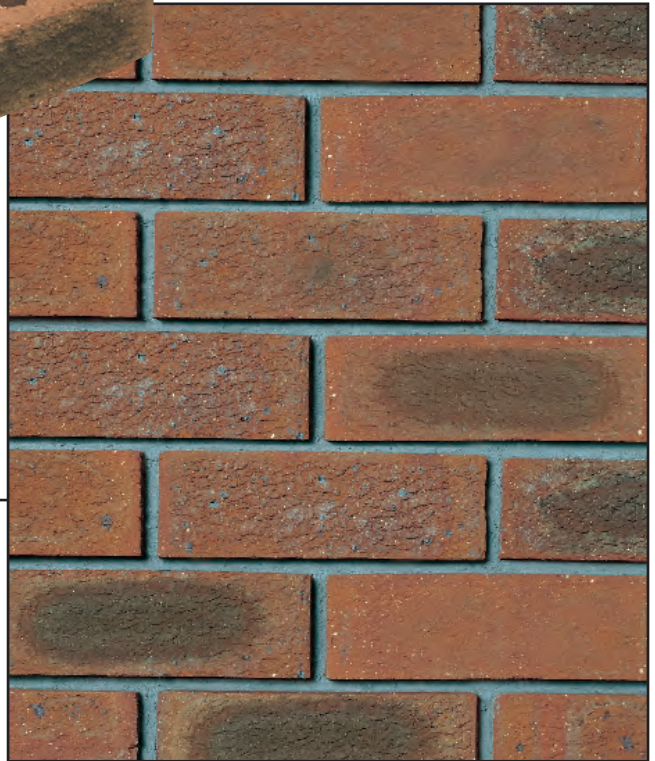

<b>Class</b>	<b>FBA</b>
<b>Average Compressive Strength</b>	<b>39 MPA</b>
<b>Material</b>	<b>Clay, perforated</b>
<b>Average mass</b>	<b>2,5 Kg</b>
<b>Average size</b>	<b>222x106x73mm</b>
<b>Moisture Expansion</b>	<b>Category II/III</b>
<b>Average Water absorption</b>	<b>9,5%</b>
<b>Efflorescence</b>	<b>Slight</b>

## TRAVERTINE

Coverage  
52  
per m<sup>2</sup>



<b>Class</b>	<b>FBA</b>
<b>Average Compressive Strength</b>	<b>39 MPA</b>
<b>Material</b>	<b>Clay, perforated</b>
<b>Average mass</b>	<b>2,7 Kg</b>
<b>Average size</b>	<b>222x106x73mm</b>
<b>Moisture Expansion</b>	<b>Category II/III</b>
<b>Average Water absorption</b>	<b>7,7%</b>
<b>Efflorescence</b>	<b>Slight</b>



SPECIALS: AVAILABLE BY ARRANGEMENT

Due to the natural qualities of clay, variations in brick colours may occur – use this catalogue as a general guide.

Crammix Pty Ltd., P.O. Box 2, Brackenfell, Western Cape, 7561, Tel: 021 981-2115, Fax: 021 981-4520  
George Depot: Tel: 044 878-0186, Fax: 044 878-0191  
Blouberg Sales Office: Tel: 021 554-0545, Fax: 021 554-0546  
E-mail: [bricks@crammix.co.za](mailto:bricks@crammix.co.za) Web: [www.crammix.co.za](http://www.crammix.co.za)



# FLAME BLUE FACE BRICK

5b

## SMOOTH

Coverage  
52  
per m<sup>2</sup>



Class	FBA
Average Compressive Strength	45 MPA
Material	Clay, perforated
Average mass	2,7 Kg
Average size	222x106x73mm
Moisture Expansion	Category II/III
Average Water absorption	8%
Efflorescence	Nil/Slight



# DUNE FACE BRICK

## TRAVERTINE

Coverage  
52  
per m<sup>2</sup>



Class	FBA
Average Compressive Strength	58 MPA
Material	Clay, perforated
Average mass	2,6 Kg
Average size	222x106x73mm
Moisture Expansion	Category II
Average Water absorption	6,3 %
Efflorescence	Nil/Slight



SPECIALS: AVAILABLE BY ARRANGEMENT

Due to the natural qualities of clay, variations in brick colours may occur – use this catalogue as a general guide.

Crammix Pty Ltd., P.O. Box 2, Brackenfell, Western Cape, 7561, Tel: 021 981-2115, Fax: 021 981-4520  
George Depot: Tel: 044 878-0186, Fax: 044 878-0191  
Blouberg Sales Office: Tel: 021 554-0545, Fax: 021 554-0546  
E-mail: [bricks@crammix.co.za](mailto:bricks@crammix.co.za) Web: [www.crammix.co.za](http://www.crammix.co.za)

